

OPT-IES2028P Industrial Ethernet Switch

8*10/100/1000Base-Tx(PoE) to 2*GE SFP

RoHS Compliant



>>Description

OPT-IES2028P is OPTONE produced unmanaged 10-port PoE switches, providing 2 Gigabit Ethernet fiber optional port and 8 10/100/1000Base-TX PoE ports compliant with IEEE802.3af and IEEE802.3at. While transmitting data over the cable, each PoE port can output 30 watts to PoE terminals directly, eliminating the need for additional wiring.

OPT-IES2028P supports wide operating temperature range from -40°C to 85°C, metal housing with IP40 protection class and redundant power inputs, becoming an economical and harsh environment resistant solution for the ITS, video surveillance and other automation applications.

>>Main Features

- Both standard and wide operating temperature
- Complies with IEEE 802.3, IEEE 802.3u/z/ab/z
- IEEE 802.3at/af PoE standard compliance
- Support PD detection and PD classification
- Extends distances up to 120km
- Maximum frame size of 1632 bytes
- Supports auto MDI/MDIX function
- Supports DIN-Rail and hang wall mounting
- Status LED for easy monitoring of device status
- Support 8k MAC address
- Support dual power supply backup
- IP40 protection class

>> Specifications

Interface

- 8 x Ethernet+PoE port (RJ45) 10/100/1000Base-Tx
- 2 x Optical port (SFP) 1000Base-Fx

Optical Port

- Available for 1310nm and 1550nm Single mode, 850nm Multi mode
- Transfer Distance: up to 120km
- Connectors: SFP
- Fiber core: 9/125 μ m on single-mode fiber, 50/125 μ m and 62.5 μ m on multi-mode fiber

Ethernet Port

- Available speed: force 10Mbps, force 100Mbps, force 1000Mbps and auto-detective 10/100/1000Mbps Full-Duplex and Half-Duplex auto-negotiation
- Connectors: RJ-45 Connector; MDI/MDI-X connection auto-sensing

Standard

- IEEE802.3 (10Base-T)
- IEEE802.3u (100Base-TX/FX)
- IEEE802.3ab (1000Base-T)
- IEEE802.3z (1000Base-SX/LX/CX/T)
- IEEE802.3af (Power over Ethernet Standard)
- IEEE802.3at (Power over Ethernet Enhancements Standard)

Switch Properties

- MAC Table: 8K
- Packet Buffer: 1Mbit
- Switching Delay: <5 μ s

LED Indicators

- Power Status, Speed Status, FX Link/Act, TX Link/Act

PoE Specification

- Power Output: PoE 48V DC
- PoE Power Supply type: End-Span
- Power Pin Assignment: 1/2(+), 3/6(-)
- PoE Power Budget: Each port provides max 30W feed power

Power Requirement

- Input: 48V DC
- Consumption: MAX 13W(no PD), 253W(full PD)
- Reverse Connection Protection: Support
- Redundancy Protection: Support

Physical Characteristics

- Housing: Metal enclosure
- Protection Class: IP40
- Dimensions: 53 x 165 x 145mm
- Weight: 0.9kg
- Installation: DIN-Rail or Panel mounting

Environmental Limits

- Operating Temperature: -40°C to 85°C
- Storage Temperature: -40°C to 85°C
- Operating Humidity: 10% to 95% RH (non-condensing)
- Storage Humidity: 5% to 95% RH (non-condensing)

Agency Approvals

- FCC Part 15 of Class A & CE approved


Industrial Standard

- EMI: FCC/CE/LVD/EMC
- EMS:
 - IEC61000-4-2 (ESD): ± 8 kV (contact), ± 15 kV (air)
 - IEC61000-4-3 (RS): 10V/m (80MHz-2GHz)
 - IEC61000-4-4 (EFT): Power Port: ± 4 kV; Data Port: ± 2 kV
 - IEC61000-4-5 (Surge): Power Port: ± 2 kV/DM, ± 4 kV/CM; Data Port: ± 2 kV
 - IEC61000-4-6 (CS): 3V (10kHz-150kHz); 10V (150kHz-80MHz)
 - IEC61000-4-16 (Common mode conduction): 30V (cont.), 300V (1s)
- Shock: IEC 60068-2-27
- Free Fall: IEC 60068-2-32
- Vibration: IEC 60068-2-6

Warranty

- 5 years

>> Mechanical Drawing

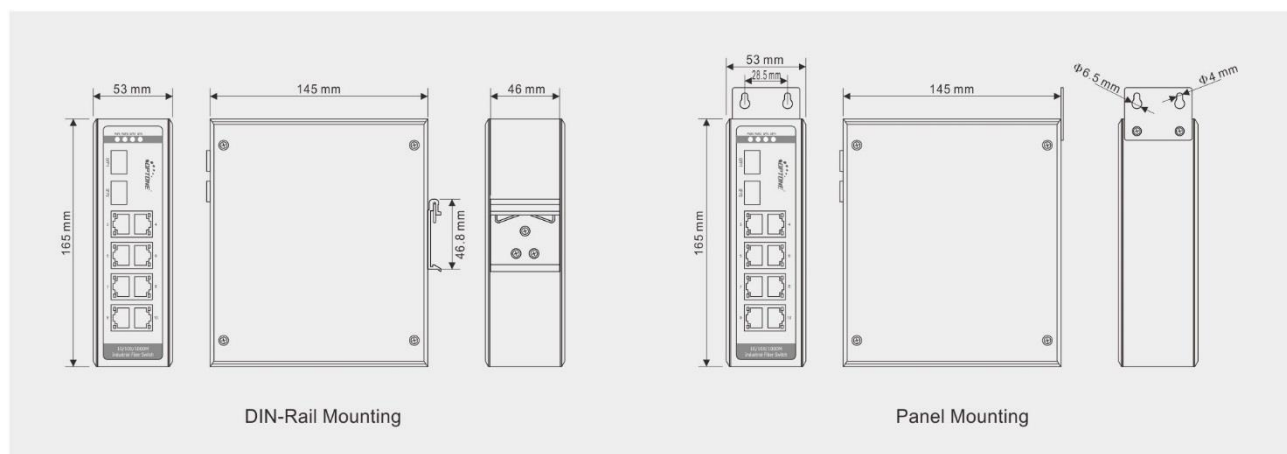



>>Ordering Information

OPT-IES2028P 8*10/100/1000Base-Tx(PoE) to 2*GE SFP Fiber ports

Optional SFP

<i>Model</i>	<i>Rate</i>	<i>Wavelength</i>	<i>Distance</i>	<i>Connector</i>
SFP-SX-MM-0205I	1.25Gbps	850nm	0.5km	Duplex LC
SFP-LX-SM-0220I	1.25Gbps	1310nm	20km	Duplex LC
SFP-LX-SM-0240I	1.25Gbps	1310nm	40km	Duplex LC
SFP-ZX-SM-0280I	1.25Gbps	1550nm	80km	Duplex LC

>>Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by OPTONE before they become applicable to any particular order or contract. In accordance with the OPTONE policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of OPTONE or others. Further details are available from any OPTONE sales representative.

sales@optone.net
<http://www.optone.net>