

OPT-IES1008M Series Industrial Ethernet Switch (Managed)

8*10/100Base-Tx

RoHS Compliant



>>Description

OPT-IES1008M series are equipped with 8 Fast Ethernet ports, making them ideal for applications that demand high bandwidth, and also are one of Optone new ultralow power consumption Green Managed Ethernet managed solutions, supporting three means of administrative access: Console, Telnet and WEB.

OPT-IES1008M series adopts the OPT-Ring Ring network technology, the user can easily set Redundance Ring Network in order to increase network reliability, moreover also support a variety of network management functions, such as: 802.1Q VLAN, QOS, IGMP Static Multicast, Port Trunk, Port Mirroring, ect. They can be applied extensively in wind power, distribution network automation, subway PIS, power SCADA, wastewater treatment, metallurgy, intelligent transportation, rail transit, and many other industries.

>>Main Features

- Support OPT-Ring Redundance Ring Network technology
- Support IEEE802.1Q VLAN setting, effective control of the broadcast domain.
- Support IEEE802.1p-QoS function.
- Support IGMP Static Multicast, Port Trunk, Port Mirroring, ect.
- Supports auto MDI/MDIX function
- Supports DIN-Rail and hang wall mounting
- Status LED for easy monitoring of device status
- Maximum frame size of 1632 bytes
- Support 8k MAC address
- Support dual power supply backup
- IP40 protection class

>> Specifications

Interface

- 8 x Ethernet port (RJ45) 10/100Base-Tx
- 1 x Console port (RJ45)

Ethernet Port

- Available speed: force 10Mbps, force 100Mbps and auto-detective 10/100Mbps Full-Duplex and Half-Duplex auto-negotiation
- Connectors: RJ-45 Connector; MDI/MDI-X connection auto-sensing

Standard

- IEEE802.3 (10Base-T)
- IEEE802.3u (100Base-TX/FX)
- IEEE802.3x (Flow control)
- IEEE802.1Q (VLAN)
- IEEE802.1p (Class of Service)
- IEEE 802.1w (RSTP)
- SNMP v1/v2c(Simple Network Management Protocol)

Switch Properties

- MAC Table: 8K
- Packet Buffer: 1Mbit
- Switching Delay: <5μs

LED Indicators

- Power Status, Speed Status, TX Link/Act

Power Requirement

- Input: 12VDC~48VDC
- Consumption: MAX 4.7W
- Reverse Connection Protection: Support
- Redundancy Protection: Support
- Dual Power: Support

Physical Characteristics

- Housing: Metal enclosure
- Protection Class: IP40
- Dimensions: 53 x 165 x 145mm
- Weight: 0. 87kg
- Installation: DIN-Rail or Panel mounting

Environmental Limits

- Operating Temperature: -40°C to 85°C
- Storage Temperature: -40°C to 85°C
- Operating Humidity: 10% to 95% RH (non-condensing)
- Storage Humidity: 5% to 95% RH (non-condensing)

Agency Approvals

- FCC Part 15 of Class A & CE approved


Industrial Standard

- EMI: FCC/CE/LVD/EMC
- EMS:
 - IEC61000-4-2 (ESD): ±8kV (contact), ±15kV (air)
 - IEC61000-4-3 (RS): 10V/m (80MHz-2GHz)
 - IEC61000-4-4 (EFT): Power Port: ±4kV; Data Port: ±2kV
 - IEC61000-4-5 (Surge): Power Port: ±2kV/DM, ±4kV/CM; Data Port: ±2kV
 - IEC61000-4-6 (CS): 3V (10kHz-150kHz); 10V (150kHz-80MHz)
 - IEC61000-4-16 (Common mode conduction): 30V (cont.), 300V (1s)
- Shock: IEC 60068-2-27
- Free Fall: IEC 60068-2-32
- Vibration: IEC 60068-2-6

Warranty

- 5 years

>> Mechanical Drawing

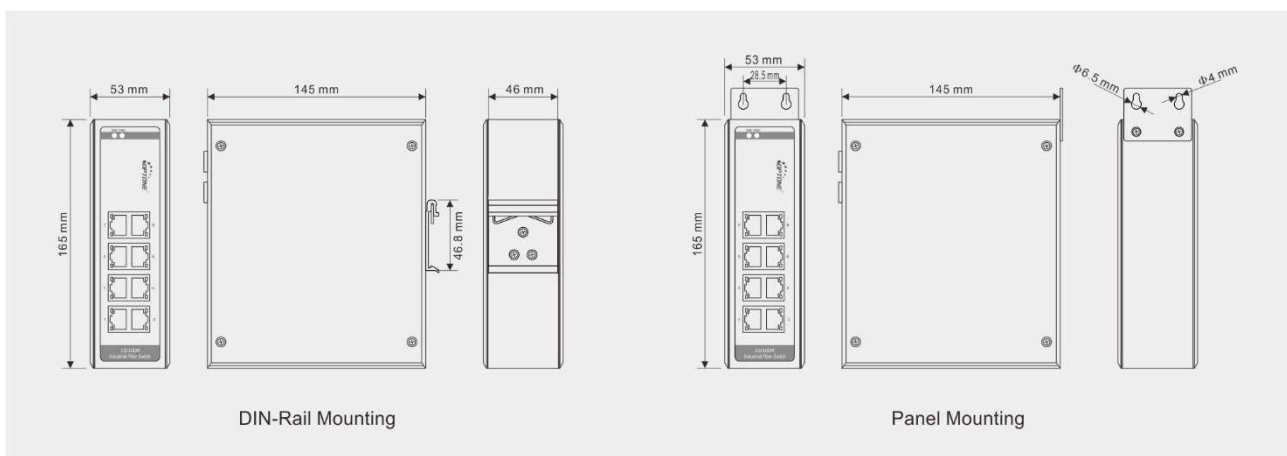



>>Ordering Information

OPT-IES1008M 8*10/100Base-Tx, Industrial, DIN-Rail or hang wall mounting, with Managed

>>Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by OPTONE before they become applicable to any particular order or contract. In accordance with the OPTONE policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of OPTONE or others. Further details are available from any OPTONE sales representative.

sales@optone.net
<http://www.optone.net>